

PM Filter WDM (980/1064, 1030/1064, 980/1550nm)


Features	
Low Insertion Loss High Extinction Ratio & High Isolation High stability and reliability	
Application	
Fiber Laser Fiber Amplifier Testing equipment	

Specifications

Type		980/1064	1030/1064	980/1550
Parameter				
Pass wavelength (nm)		960~990 or 1020~1080	1064+/-2.5	1520~1580
Reflection wavelength (nm)		1020~1080 or 960~990	1030+/-10	960~990
Pass Insertion Loss (dB)		≤0.8	≤0.8	≤0.7
Reflection Insertion Loss (dB)		≤0.5	≤0.5	≤0.5
Pass channel Isolation (dB)		≥25	≥25	≥25
Reflection Isolation (dB)		≥12	≥12	≥12
Channel Flatness (dB)		≤0.3		
Extinction Ratio (dB)		≥20		
Return Loss (dB)		≥50		
Insertion loss thermal stability (dB/°C)		≤0.005		
Power handling CW (mW)		≤300		
Fiber Type	Comm & Pass port	PM 980	PM 980	PM 1550
	Reflection Port	PM 980	PM 980	HI1060 or PM 980
Operating temperature (°C)		0 ~ +65		
Storage temperature (°C)		-40 ~ +85		
Dimensions (mm)		φ5.5×L35		

For device with connector, IL is 0.3dB higher, RL is 5dB lower, ER is 2dB lower. The default connector key is aligned to slow axis

Package Dimensions

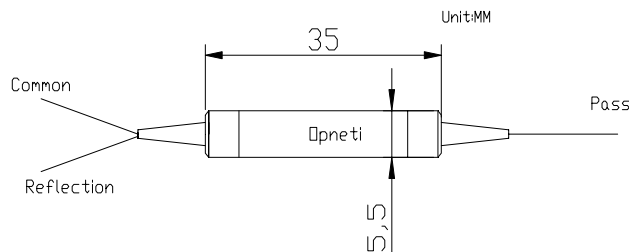

Ordering Information

PMFWDM	Port Type	Wavelength	Pigtail Type	Fiber Type	Length	Connector
	1x1 1x2	980T/1064R 980R/1064T 1550T/980R 1064T/1030R	250=250um bare fiber 900=900um loose tube 3000=3mm loose tube	5=Panda fiber	1= 1m X=Specify	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC XX=Other