

Nano Speed™ High Power 1x1 Solid-State Fiberoptic Switch

Product Description

The NS Series 1x1 high power solid-state fiber optic switch connects optical channels by redirecting an incoming optical signal into a selected output optical fiber. This is achieved using a patent pending non-mechanical configurations with solid-state all-crystal design which eliminates the need for mechanical movement and organic materials. The NS fiberoptic switch is designed to meet the most demanding switching requirement of ultra-high reliability, fast response time, and continuous switching operation.

The device can be driven by a cost effective circuit with 12V input voltage and 0-5 V control signal



Performance Specifications

NH Series 1x1 Switch	Min	Typical	Max	Unit
Operation Wavelength	400		1800	nm
Insertion Loss	0.4	0.6	1.0	dB
Isolation	20	25	35	dB
Polarization Dependent Loss		0.15	0.35	dB
IL Temperature Dependency		0.25	0.5	dB
Polarization Mode Dispersion		0.1	0.3	ps
Return Loss	45	50	60	dB
Response Time (Rise, Fall)			300	ns
Repetition Rate	DC	5	300**	KHz
Operating Temperature	-5		70	°C
Optical Power Handling			5***	W
Storage Temperature	-40		85	°C
Package Dimension		65.5x25x7		mm

* Driver kit is recommended

** Special circuit

*** Continuous operation, for pulse operation call

Features


- Solid-State high speed
- Ultra-high reliability
- Low insertion loss
- Compact
- Low cost
- Low power consumption
- Simple driver

Applications



- Optical blocking
- Configurable operation
- Instrumentation

Nano Speed™ High Power 1x1 Solid-State Fiberoptic Switch

Mechanical Dimensions (mm)

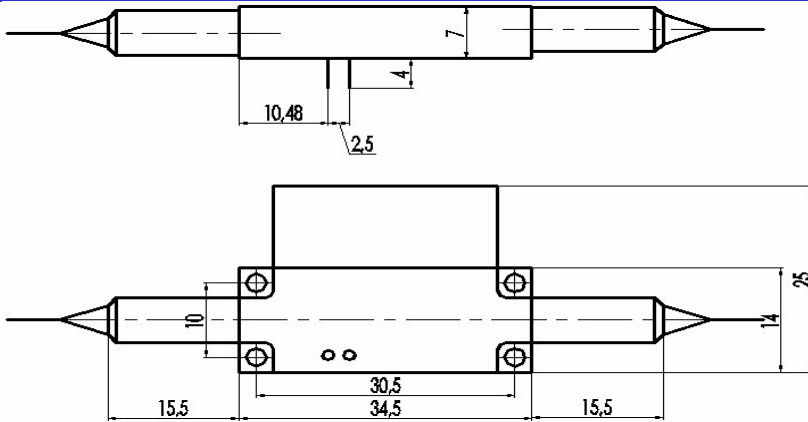


Speed and Repetition Measurement

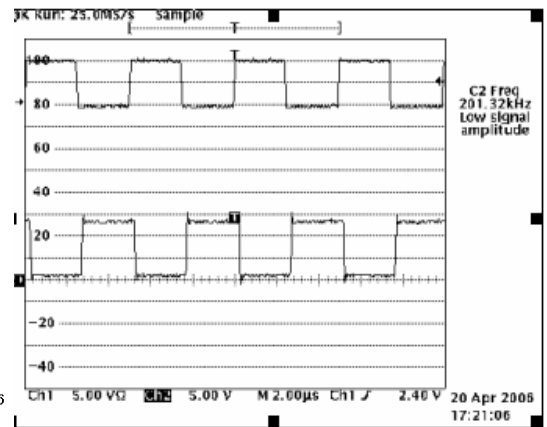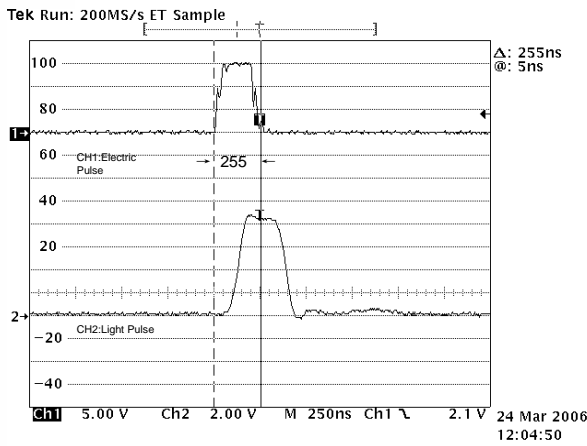

Nano Speed™ High Power 1x1 Solid-State Fiberoptic Switch

Bandwidth Measurement

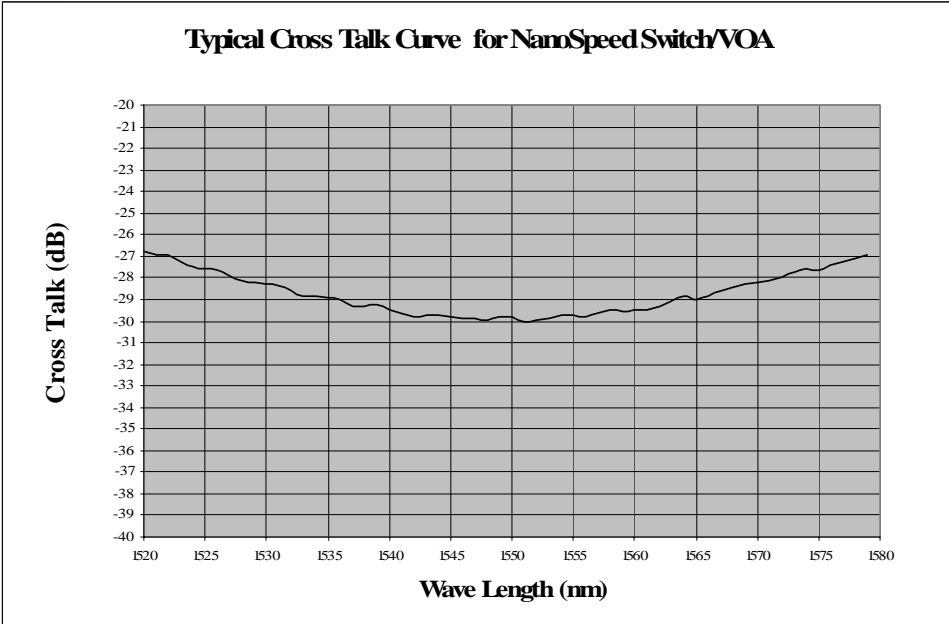

Ordering Information

NHSW-	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/>	1	1	1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Type	Wavelength	Configuration	Package	Fiber Type		Fiber Length	Connector
	1x1=11	1550 = 5 1310 = 3 Special = 0			SMF-28 =1 Special=0	Bare fiber =1 900um loose tube=3 Special=0	0.25m= 1 0.5m = 2 1.0 m= 3 Special =0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC = 7 Special = 0