

Chirped FBG

Alxenses's Chirped fiber Bragg grating is an in-fiber broadband reflective optical filter. Using advanced fabrication technique and production facilities, grating period and refractive index modulation depth along the length of FBG can be precisely controlled to produce chirped fiber Bragg grating with different spectral and dispersion characteristic. The broad bandwidth and customizable spectral shape of chirped fiber Bragg grating is particular effective in gain and spectral flattening of EDFA or ASE optical source.

Features

- Low insertion loss
- Customized reflection spectrum
- Wide bandwidth



Applications

- ASE filtering
- EDFA gain flattening
- Broadband reflector for fiber laser
- Dispersion compensation

SPECIFICATIONS

Chirped FBG

Parameters	Values	Units
Center Wavelength	1550 & 1650	nm
Center Wavelength Tolerance	+/- 6.5	nm
Reflectivity	>90	%
FWHM	>2	nm
Typical Insertion Loss	0.5	dB
Fiber Termination	Bare Fiber, FC/UPC or FC/APC	--
Fiber Type	SMF-28 or Compatible	--

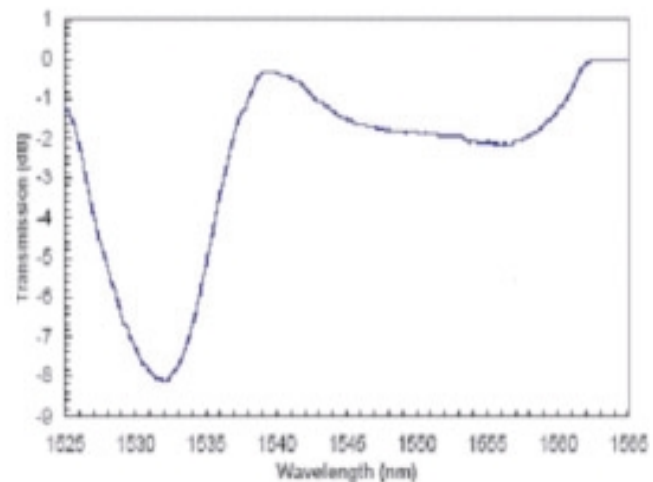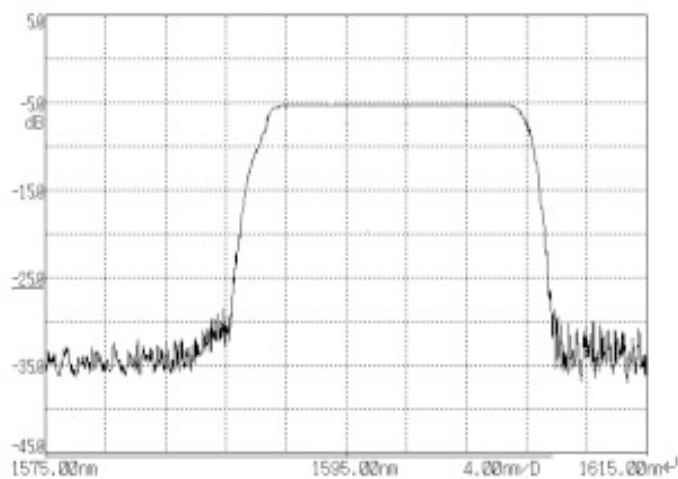

Chirped FBG Enquiry Form

Parameters	Units	Standard Specifications	Customized Specifications
Center Wavelength	nm	1550 & 1650	
Center Wavelength Tolerance	nm	+/- 6.5	
Reflectivity	%	>90	
FWHM	nm	>2	
Fiber Termination	--	Bare Fiber, FC/UPC or FC/APC	
Connector type: Please specify	--	Customized	
Fiber Type	--	SMF-28 or Compatible	