

1x2(2x2) Fused PM Fiber Standard Coupler

Features	
Low Excess loss & Low Insertion Loss High Extinction Ratio High stability and reliability	
Application	
Optical Amplifier, Power Monitoring Coherent Communication Fiber Gyroscope Fiber Sensor	

Specification


Parameter	Value
Central Wavelength (nm)	780,850
Bandwidth (nm)	±10
Typ. Excess Loss (dB)	0.5
Max.Excess Loss (dB)	≤0.8
ER (dB)	≥18
Directivity (dB)	≥50
Operating Temperature(°C)	-5 ~ +75
Storage Temperature (°C)	-40 ~ +85

For device with connector, IL is 0.3dB higher, RL is 5dB lower, ER is 2dB lower. The default connector key is aligned to slow axis.

Package Information

Configuration	1x2 or 2x2	
Fiber length	0.5m, others on request	
Fiber Type	Corning Panda PM 850	
Pigtail type	250μm bare fiber	900μm loose tube
Dimensions(mm)	φ3.0×60	φ3.0×76

Package Dimensions

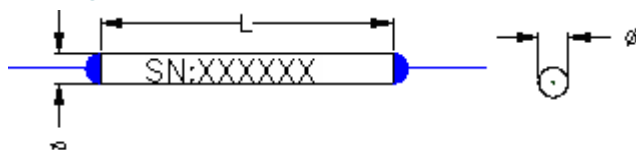

Ordering Information

CP	Type	Grade	Port Type	Wavelength (nm)	Coupling Ratio	Pigtail Type	Fiber Type	Length	Connector	Package
	PS=PM fused coupler	P A	1x2 2x2	780 850	1/99 2/98 3/97 50/50	250=250um bare fiber 900=900um loose tube 2000=2mm loose tube 3000=3mm loose tube	5=Panda fiber	0.5= 0.5m 0.8=0.85m X:other	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC XX=Other	3x54