


LD Stabilizer Type

### 1. FEATURE

- High wavelength stability
- High accurate reflectance
- High Reliability
- with Lensed Fiber / Metallize/ AR coating / Connectors

### 2. APPLICATION


- LD Module

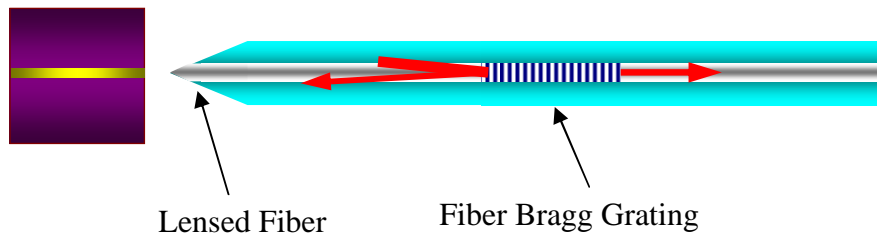

### 3. SPECIFICATION

Model No.	FBG		unit
Center Wavelength	980	1550	[nm]
Band Width	0.4 ~ 4.0	0.14 ~ 0.18	[nm]
Reflectivity	2 ~ 10	10 ~ 40	[%]
Side Lobe	10		[dB]
Fiber Type	SMF		
Fiber Strength	150		[kpsi]

### 4. APPEARANCE

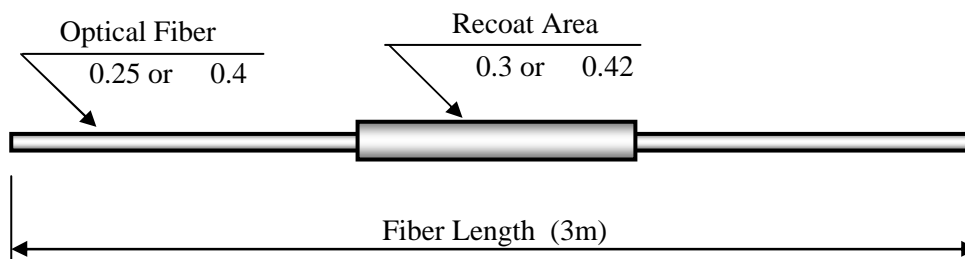

**Namiki Integrates all of Fiber Assembly Needs by One Shop !**