


[IN-LINE TYPE FIXED ATTENUATOR]

- In-line type attenuator for S/M application
- Custom spec available in attenuation, wavelength and length

FA213 series (ø3mm cable type)

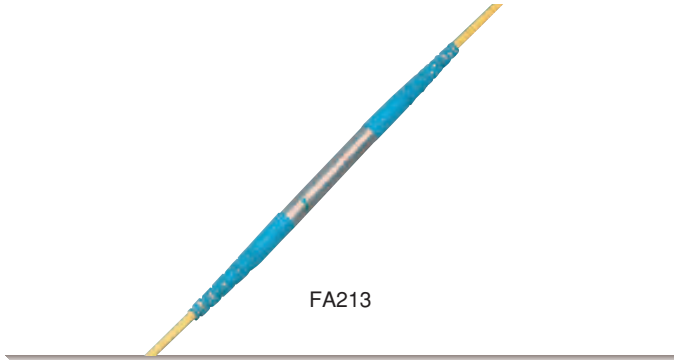

ORDERING INFORMATION

FA213-35 - [a] - [b] - [c]

Ex.) FA213-35 - 01 - 2 - SSCP3

a	Attenuation	SEE TABLE 4 (P24)	
b	Connector Qty	None	0
		One side	1
		Both side	2
c	Connector Type	FC (UPC)	SAP1
		FC (APC R)	SNP2K
		FC (APC N)	SNP2D
		SC (UPC)	SSCP3
		SC (APC)	SSCPN3

[PLUG TYPE FILTER]

- Our filter is wideband filter incorporating dielectric multilayer film
- Our filter provide reliable environmental characteristics with our exclusive assembly technology which allowed epoxy free in optical path

SHORT PASS FILTER




ORDERING INFORMATION

FP [a] - [b] - [c] - [d]

Ex.) FP 100 - HP - 13/15 - SPF

a	Connector Type	FC	100
		SC metal	115
b	Polishing	PC polishing	HP
		Angle PC polishing	AP
c	Wavelength	1310/1550	13/15
		1490/1550	14/15
		1310+1550/1625	15/16
d	Grade	Standard	SPF

LONG PASS FILTER

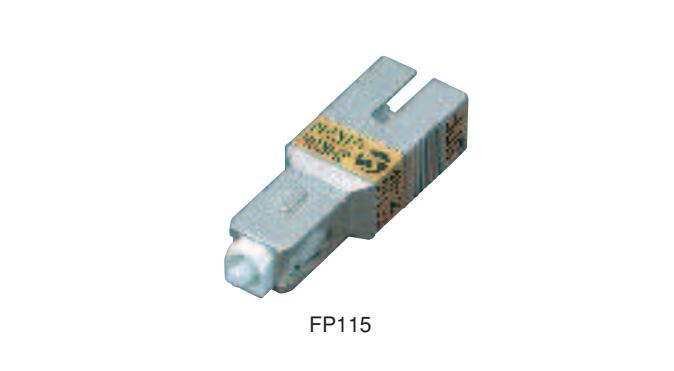

ORDERING INFORMATION

FP [a] - [b] - [c] - [d]

Ex.) FP 100 - HP - 13/15 - LPF

a	Connector Type	FC	100
		SC metal	115
b	Polishing	PC polishing	HP
		Angle PC polishing	AP
c	Wavelength	1310/1550	13/15
		1490/1550	14/15
d	Grade	Standard	LPF