


Specification

ADSS 2-72 Core Outdoor Optical Cable

Product structure diagram

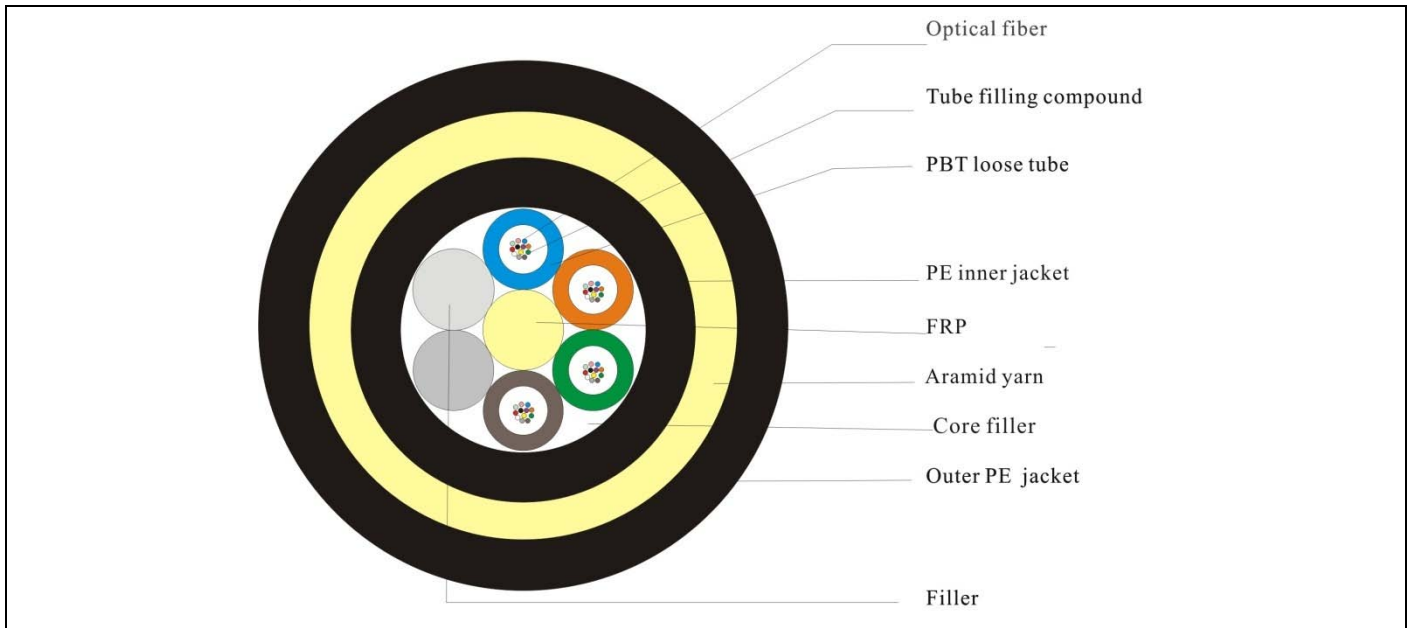

Construction

1. Colored fiber
Coated outside diameter: $125.0 \pm 0.1 \mu\text{m}$
Optical fiber diameter: $242 \pm 7 \mu\text{m}$
UV color fiber: Standard chromatogram
-Blue, Orange, Green, Brown, Gray/Slate, White, Red, Black, Yellow, Violet, Rose/Pink, Aqua
 2. Tube filling compound(Gel)
 3. PBT loose tube
 4. Inner PE jacket
 5. FRP Central strength member
 6. Aramid yarn
 7. Core filler
 8. Filler
 9. Black PE out jacket
- Outside diameter: $12.1 \pm 0.3 \text{ mm}$

Product parameters

Performance	
Span (m)	100
Storage and operating temperature	$-40^{\circ}\text{C} - +70^{\circ}\text{C}$
Min. Bending Radius	30D(Dynamic) 15D(Static)

Parameters of fiber

Fiber style	Unit	SM G652	SM G652D
Condition	nm	1310/1550	1310/1550
Attenuation	dB/km	0.36/0.23	0.36/0.23
Dispersion	1550nm	Ps/(nm*km)	---
	1625nm	Ps/(nm*km)	---
Bandwidth	850nm	MHZ · km	----
	1300nm	MHZ · km	---
Zero dispersion wavelength	nm	1300-1324	$\geq 1302, \leq 1322$

Zero dispersion slope	nm	≤ 0.092	≤ 0.091
PMD Maximum Individual Fiber		≤ 0.2	≤ 0.2
PMD Design Link Value	Ps/(nm ² *km)	≤ 0.12	≤ 0.08
Fiber cutoff wavelength λ_c	nm	$\geq 1180, \leq 1330$	$\geq 1180, \leq 1330$
Cable cutoff wavelength λ_{cc}	nm	≤ 1260	≤ 1260
Mode field diameter(MFD)	1310nm	um	9.2±0.4
	1550nm	um	10.4±0.8

Appearance and packaging

1. No damage on the surface; no trachoma.
2. Wooden tray packaging; wood whole seal packaging
3. Segment length: no less than 1000M. The segment length of each tray of the same batch shall be similar as much as possible. Other lengths can be agreed upon through consultation.
4. Report certificate: It includes optical cable inspection number, optical cable type, core number, optical fiber type, length, etc