

2000nm Polarization Insensitive Circulator


Features	
Low Insertion Loss	
High stability and reliability	
Application	
Amplifier	
Fiber Laser	

Specifications

Type Parameter	Value
Operating wavelength (nm)	2000
Bandwidth (nm)	±30
Isolation (dB)	≥16
Insertion Loss (dB)	≤1.5
PDL (dB)	≤0.2
Cross Talk (dB)	≥40
Return loss (dB)	≥50
Power handling (W)	≤0.3, 0.5, 1
Fiber Type	SMF-28e or Nufern SM1950 fiber
Operating temperature (°C)	-5 ~ +50
Storage temperature (°C)	-40 ~ +85
Dimensions (mm)	39x12x17

*Above specifications are for devices without the connectors.

Package Dimensions

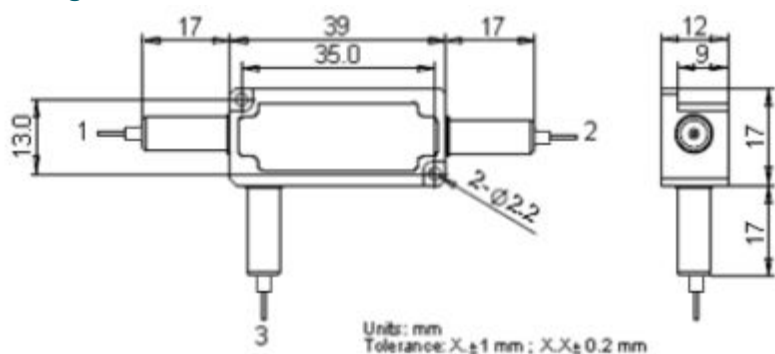

Ordering Information

CIR	Port	Wavelength	Pigtail Type	Fiber Type	Length	Connector
	3=3 Port	2000=2000nm	250=250um bare fiber 900=900um loose tube 3000=3mm loose tube	1=SMF-28e 2= Nufern SM1950	0.8= 0.8m 1=1m	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC C XX=Other