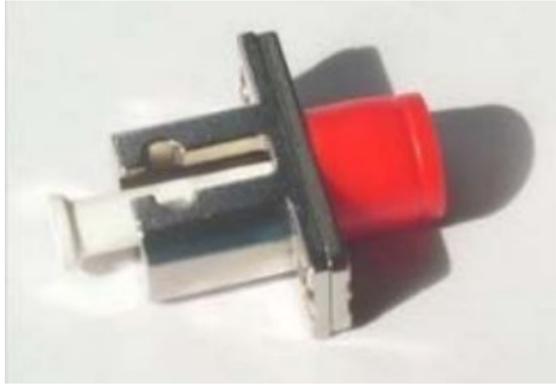



Hybrid Adapter

Features	
Low insertion loss High repeatability	
Application	
LAN, data network CATV network Telecommunication	

Specifications

Insertion loss	≤0.2 dB
Plug and unplug force (g/f)	200~600
Durability	1000 times
Operating temperature	-40 ~ 75°C

Part Number	Description	Photo
AD-LC/FC-S	LC-FC simplex metal adaptor	
AD-LC/SC-S	LC to SC simplex metal adaptor	
AD-STF/FCF-S	ST female to FC female simplex metal adaptor	

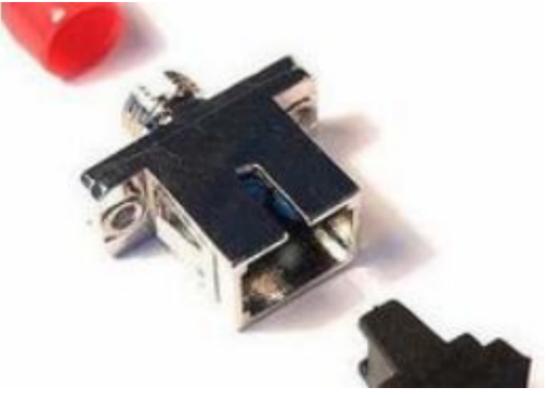AD-SCF/FCF-S	SC female to FC female simplex metal adaptor	
AD-SCF/STF-S	SC female to ST female simplex metal adaptor	
AD-STF/SCF-D	ST female to SC female duplex metal adaptor	
AD-STF/LCF-S	ST female to LC female simplex adaptor	
AD-STF/LCM-S	ST female to LC male simplex adaptor	