


Multimode Pump Protector

Features	
Low Insertion Loss High Power High stability and reliability	
Application	
Fiber Laser	

Specifications

Parameter	Values
Pass Wavelength (nm)	915 or 975
Bandwidth (nm)	±15
Insertion Loss (dB)	≤0.6
Blocked Wavelength (nm)	1020-1100 or 1500~1600
Isolation (dB)	≥25
Backward Signal Attenuation	≥30
Return loss (Input/output) (dB)	≥30
Power handling (W)	10,25
Fiber Type	Multimode Fiber 105/125 (NA 0.15 or 0.22) or 50/125 or 62.5/125
Operating temperature (°C)	-5 ~ +65
Storage temperature (°C)	-40 ~ +85
Package(mm)	5.5x35

Package Dimensions:

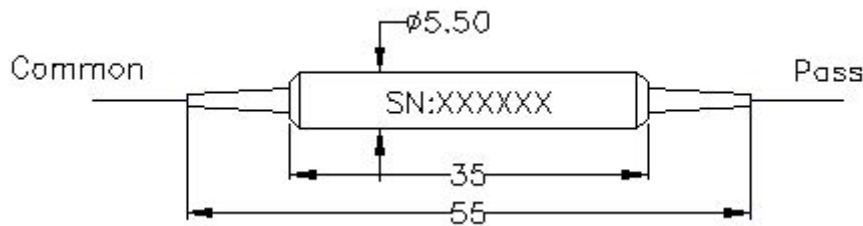

Ordering Information

PLP	Wavelength	Pigtail Type	Fiber Type	Length	Power
	915 975	900=900um loose tube	0=105/125 NA 0.15 1=105/125 NA 0.22 2=50/125 3=62/125	0.8= 0.8m	10=10W