

4 Port Polarization Maintaining Optical Circulator (1310,1550nm)

Features	
Low Insertion Loss High Extinction Ratio & High Isolation High stability and reliability	
Application	
EDFA Fiber Optical Instrument Fiber Sensor Fiber sensor	

Specifications


Type Parameter	Type A	Type B
Operating wavelength (nm)	1310 or 1550	
Bandwidth	±30	±20
Typ. Isolation 23℃(dB)	50	30
Isolation 23℃(dB)	≥40	≥20
Typ. Insertion Loss 23℃ (dB)	0.8	0.7
Insertion Loss (dB)	≤1.1	≤1.0
Extinction Ratio (dB)	≥20	≥20
Cross Talk (dB)	≥50	
Return loss (dB)	≥50	
Power handling (CW, total) (mW)	≤300	
Fiber Type	Panda Fiber	
Operating temperature (℃)	-5 ~ +70	
Storage temperature (℃)	-40 ~ +85	
Dimensions (mm)	φ5.5×L35	

*Above specifications are for devices without the connectors.

*For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower, and ER will be 2dB lower. *The PM fiber and the connector key are aligned to the slow axis. And for F type, fast axis is blocked.

*The transmission optical path of A type is different from B type: Type A: 1 -> 2, 2 -> 3, 3 -> 4; Type B: 1 -> 2, 2 -> 3, 3 -> 4;4->1

Package Dimensions

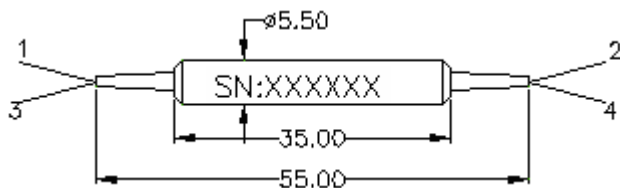

Ordering Information

PM CIR	Port	Type	Wavelength	Axis Alignment	Pigtail Type	Fiber Type	Length	Connector
	4=4 Port	A B	1310 1550	F=Fast axis blocked	250=250um bare fiber 900=900um loose tube 3000=3mm loose tube	5=Panda fiber	0.8= 0.8m 1=1m	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC XX=Other