

## Polarization Maintaining Optical Fiber Mirror


<b>Features</b>	
Low Insertion Loss Compact Size Environmental Stability	
<b>Application</b>	
EDFA DWDM System Fiber Instruments Fiber Sensor	

### Specifications:

Parameter	Values	
Operating Center wavelength (nm)	1310	1480,1550
Operating bandwidth (nm)	±30	
Insertion loss (dB)	≤0.6 (Typ. 0.5)	
Extinction Ratio (dB)	≥20	
Power handling (mW)	≤300	
Fiber Type	PM 1310 Panda Fiber	PM 1550 Panda Fiber
Operating temperature(°C)	-5 ~ +70	
Storage temperature(°C)	-40~ +85	
Package dimensions(mm)	Φ5.5x35 or Φ4.5x25	

Above specification are for devices without connector ,For device with connector, IL is 0.3dB higher,

### Package Dimension

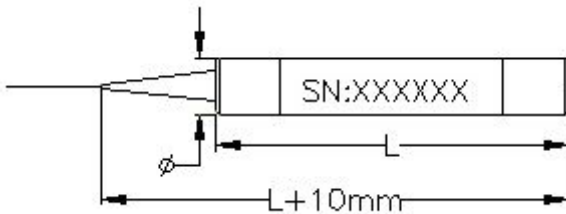

### Ordering Information:

PMOFM	Wavelength	Pigtail Type	Fiber Type	Length	Connector	Package Dimension
	1550	250=250um bare fiber 900=900um loose tube	5=Panda fiber	0.8= 0.8m	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC XX=Other	5.5x35