


# Ox-SAC-08

Single Angled Cleaver



- Angled cleaving of SMF and PM Fiber
- Highly repeatable cleave angle
- Rugged construction for field use
- Detachable fiber holder for angled mechanical splice

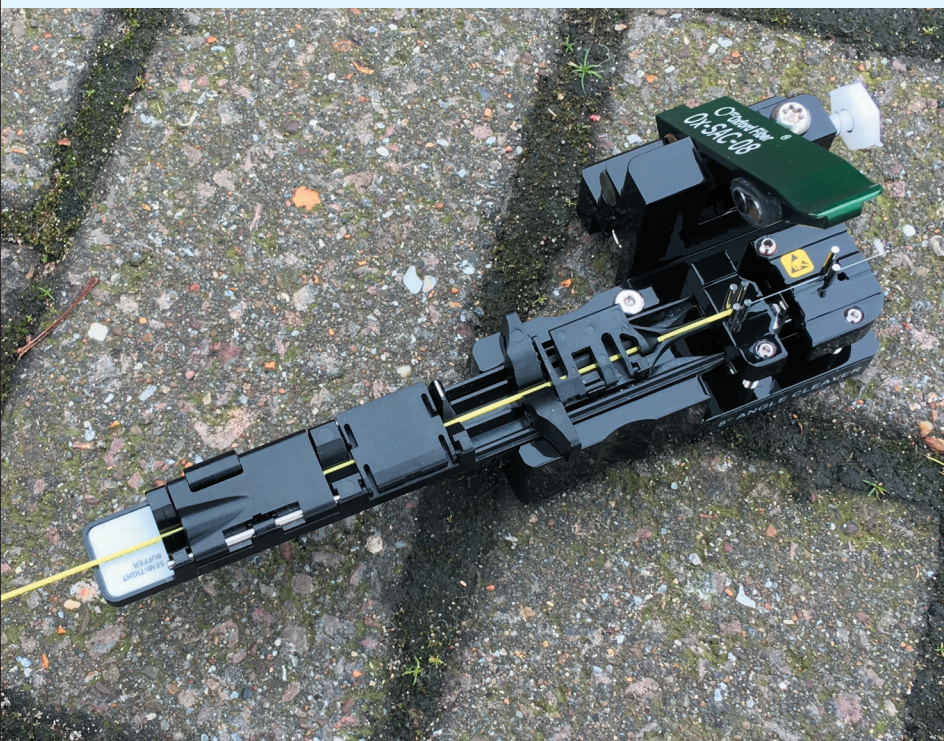

OXFORD FIBER®

Oxford Fiber Ltd  
Sir Frank Whittle Business Centre  
Gt. Central Way, Butlers Leap  
Rugby, CV21 3XH, UK

Tel: +44 (0) 1788 226 010  
Website [www.oxfordfiber.com](http://www.oxfordfiber.com)  
Email [sales@oxfordfiber.com](mailto:sales@oxfordfiber.com)

## Features


- Stapler action
- Rugged construction for field use
- 10 position diamond blade for extended life
- Benchtop and handheld operation
- Easy fiber loading using detachable fiber holder
- Compatible with angled mechanical splice
- Offcut bin, tool latch & case

## Specifications

|                         |                                            |
|-------------------------|--------------------------------------------|
| <b>Fiber Diameter</b>   | 125µm SMF or PM fiber                      |
| <b>Buffer Diameter</b>  | 250-900µm                                  |
| <b>Angle over Core</b>  | 8° (+/- 2°)                                |
| <b>Blade Life</b>       | > 10,000 estimated                         |
| <b>Cleave Length</b>    | > 8mm (for 900µm);<br>> 2mm (for 250µm)    |
| <b>Dimensions (Max)</b> | 67mm x 40mm x 79mm<br>(2.7" x 1.6" x 3.1") |
| <b>Weight</b>           | 170g (0.4lbs)                              |

# Ox-SAC-08

## Single Angled Cleaver

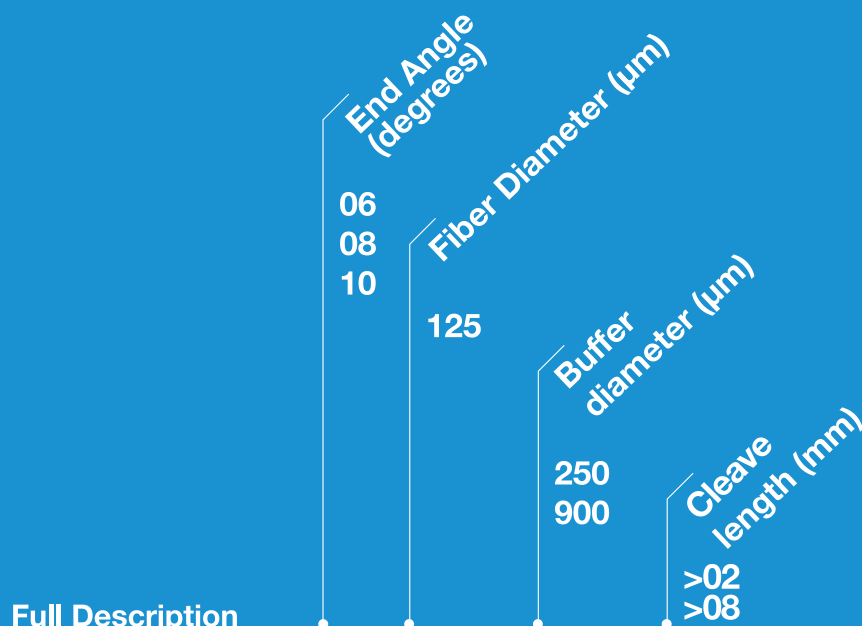

Full Description


# Ox-SAC-\*/\*/125/YYYY/Z

Example

Ox-SAC-08/125/900/08

If you require a cleaver for any other fiber type, or a custom cleaver, please contact Oxford Fiber or your local agent.

This specification may be changed without notice due to technical advances

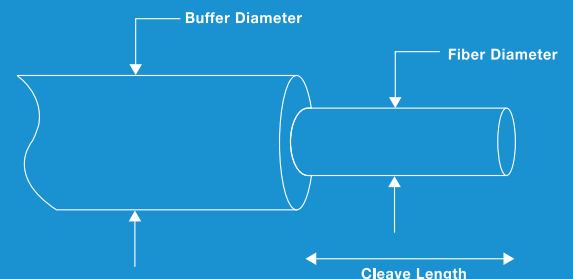

OXFORD FIBER®