


Intelli-Cross Pro LC Uniboot Connector

ALL-in-ONE

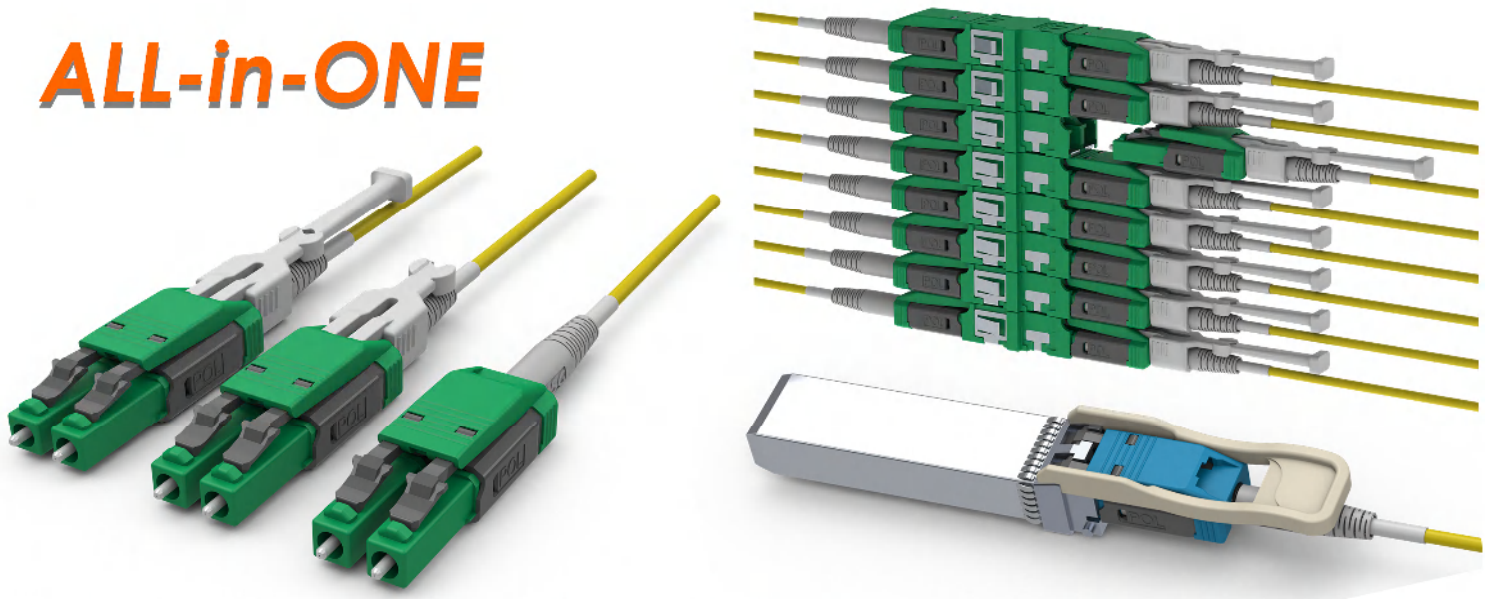

Seikoh Giken Intelli-Cross Pro LC Uniboot Connector with "Intelligent" Keying for Hyper Density Panel Management


With an ultra compact, low-profile form factor, the Intelli-Cross Pro LC Uniboot Connector incorporates a proprietary, patented micro-gear mechanism that "intelligently" syncs the A-B housing keys during polarity reconfigurations.

The Intelli-Cross Pro LC Uniboot Connector requires further less space to be installed with push-pull mechanism.


■ Main Features

- Quick, Easy & Safe polarity reverse also for APC with no tool required
- Ultra-high dense installation with low profile and Optional Push-pull Tool
- Fast & Easy polishing, both PC and APC Duplex
- Applicable for $\phi 2\text{mm}$ & $\phi 3\text{mm}$ jacketed cable

■ Quick & Safe Polarity reverse

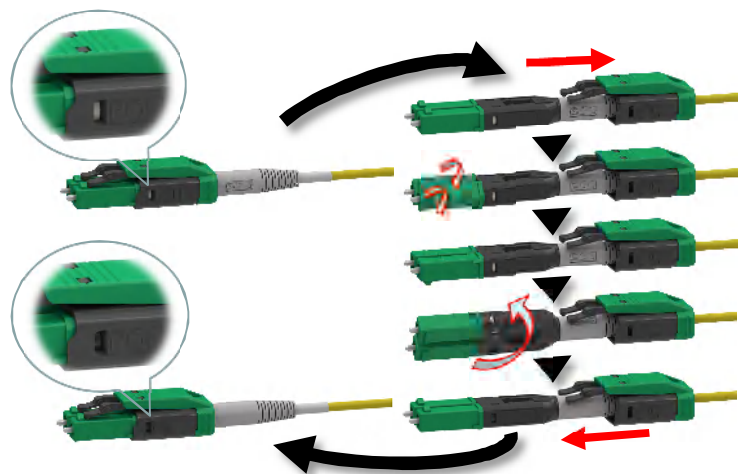

■ Ultra-high dense installation

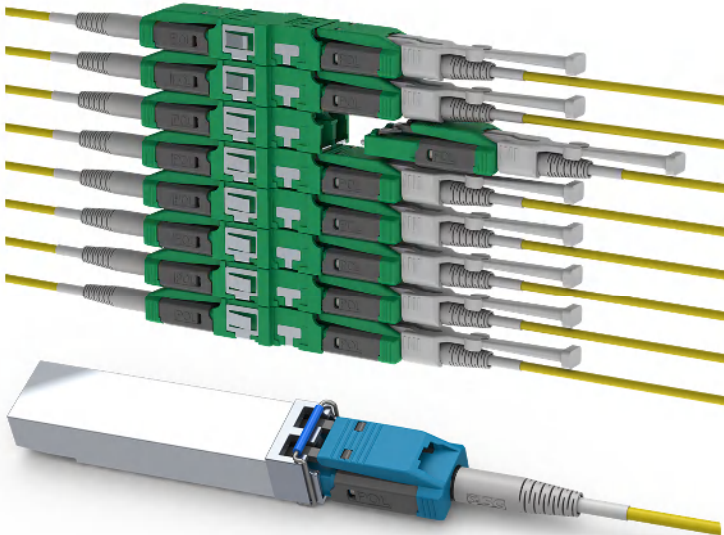


Note : In case LC interface of transceiver have the improper quality for the push-pull mating such as the heavy burrs, Intelli-Cross Pro without its optional push-pull tab is recommended.

■ Performance

	Single mode		Multimode
	UPC	APC	PC
Insertion Loss	0.3 dB		0.3 dB
Back Reflection	55 dB	65 dB	30 dB
Applicable cable	Φ2 mm, Φ3 mm		
Compliant	GR-326-CORE		TIA/EIA-568.3-D


Note : Compliant to GR-326 TWATL test with ITU-T G.657.A1/A2/B2/B3 single-mode fibers. Compliant to TIA/EIA-568.3-D with multimode bend insensitive fibers of R15 mm or less.

■ Coloring


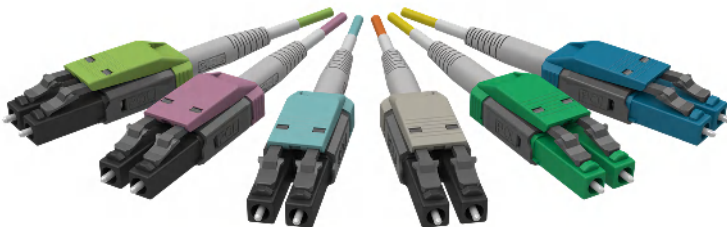


■ Easy polishing with duplex


PC

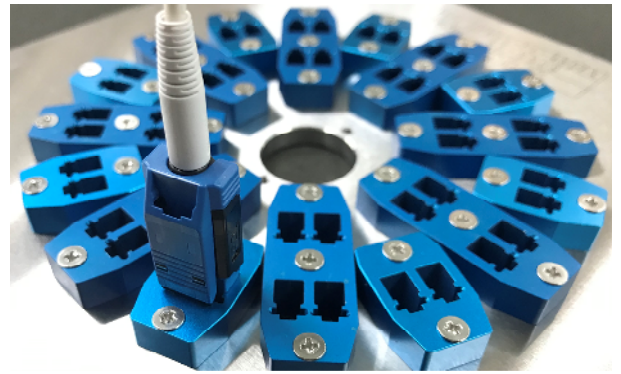

APC

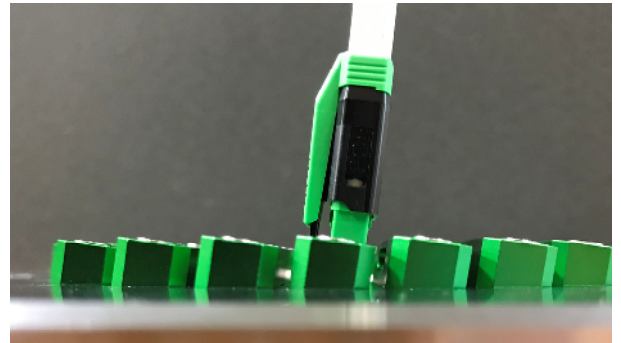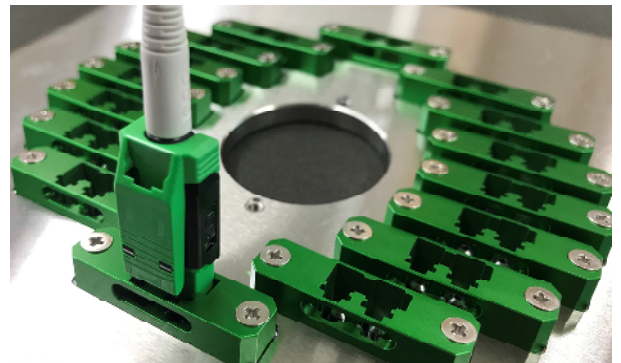

■ Dimensions

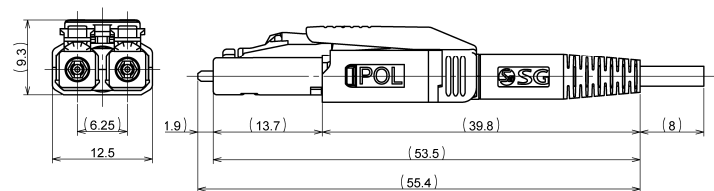

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

Americas

Atlanta, Georgia
Tel: +1-770-279-6602
Fax: +1-770-279-8839
sales@sg-usa.com

EMEA

Frankfurt, Germany
Tel: +49-6102-297-700
Fax: +49-6102-297-750
info@sg-euro.de

APAC, Japan

Matsudo, Japan
Tel: +81-47-388-6111
Fax: +81-47-388-4477
sales.div@seikoh-giken.co.jp

China

Hangzhou, China
Tel: +86-571-8777-4098
Fax: +86-571-8777-4099
sales@sg-h.cn



ICP-20-R5