


1310/1550 Mini Optical Isolator

Product Description

The OISM Series optical Isolator is a passive device that passes light in the normal direction while blocks light in the reverse direction for any state of polarization. Employing Agiltron's advanced all glass micro optics design, it features ultra-low insertion loss, high power handling high isolation, ultra-mini structure, and high stability. The device is RoHS compliant and Telcordia qualified,

an ideal choice for applications in fiber amplifiers, pump lasers and optical fiber sensors.

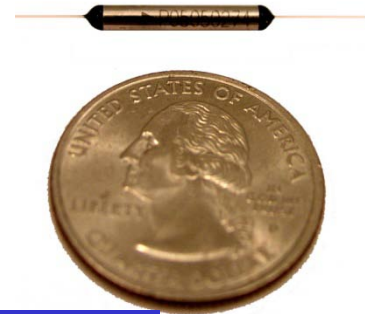

Performance Specifications

OISM Mini Dual Stage	Specification	Unit
Operation Wavelength (λ_o)	1310	1310 \pm 15
	C Band	1550 \pm 15
	L Band	1585 \pm 15
Typical Insertion Loss (λ_c , 23°C, no connector)	\leq 0.45	dB
Maximum Insertion Loss (Over λ_o , 23°C, no connector)	\leq 0.50	dB
Minimum Isolation (Over λ_o , 23°C)	\geq 45	dB
Typical Peak Isolation (λ_c , 23°C)	\geq 55	dB
Polarization Dependant Loss	\leq 0.1	dB
Polarization Mode Dispersion	\leq 0.05	ps
Return Loss (Minimum, Input/Output)	\geq 55	dB
Operating Temperature	-5 ~ +70	°C
Storage Temperature	-40 ~ +85	°C
Optical Power Handling	\leq 1	W
Package Dimensions	\varnothing 2.5 x L17	mm

Features

- Low Insertion Loss
- High Power Handling
- Compact
- High Reliability
- Low Cost
- RoHS Compliant
- Low Cost

Applications

- Optical Fiber Amplifier
- Pump Laser Source
- Fiber Optic Sensor
- Instrumentation

1310/1550 Single Mode Mini Dual Stage Optical Isolator

Ordering Information

OISM-	20	<input type="checkbox"/>	<input type="checkbox"/>	3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Type	Wavelength	Grade	Package	Fiber Type		Fiber Length	Connector
	20=Dual stage	3=1310 C=C Band L=L Band 0=Special	1=Standard 0=Special	3=Ø2.5x17	SMF-28=1 Special=0	1=Bare Fiber 3=900µm Loose Tube 0=Special	1=0.25m 2=0.5m 3=1.0m 0=Special	1=None 2=FC/PC 3=FC/APC 4=SC/PC 5=SC/APC 6=ST/PC 7=LC 0=Special

15 Presidential Way , Woburn, MA 01801 Tel: (781) 935-1200 Fax: (781) 935-2040

www.agiltron.com